

 **DMC Co., Ltd.**  
*Interface with Touch*

## **Analog Resistive Touch Screen Controller Board with Gesture Function TSC-52/U-F User's Guide**

## Table of Contents

<b>1. Product Overview</b> .....	<b>2</b>
1.1. Products Applicable.....	2
1.2. Overview .....	2
1.3. Peripheral Composition Overview .....	3
1.4 Supported Sizes of Touch Screens .....	4
1.5 Gesture function .....	4
<b>2. Specifications</b> .....	<b>5</b>
<b>3. Connector</b> .....	<b>7</b>
3.1. Explanation of a connector terminal .....	7
3.2. The mounted connector.....	7
<b>4. Interface type</b> .....	<b>8</b>
4.1. Serial mode .....	8
4.2. USB mode .....	8
<b>5. Packing Specification</b> .....	<b>9</b>
5.1. Outline.....	9
5.2. Packing material.....	9
5.3. Outer case and lot label.....	9
5.4. Product name label .....	10
<b>6. Changes &amp; Improvements</b> .....	<b>11</b>
6.1. Version History .....	11
<b>7. Warranty</b> .....	<b>12</b>
7.1. Warranty Period .....	12
7.2. Warranty Target .....	12
7.3. Warranty Exceptions .....	12
<b>8. Precautions for Use</b> .....	<b>13</b>
8.1. General Handling .....	13
8.2. Others.....	13

## Dimensional Drawing

## **1. Product Overview**

### **1.1. Products Applicable**

This specification is applicable to TSC-52/U-F.

### **1.2. Overview**

This is the IC to be used to realize gesture functions with 2-finger such as flick, pinch-in/pinch-out, rotation along with recommended circuit for 4-wire resistive Touch Screen.

This is the controller IC to transform analog signals from 4-wire Touch Screen into coordinates data of 10-bit resolution using AD conversion and then send them to host computer. Filtering processing function in the IC during detecting coordinates data enables to obtain stable coordinates data. Also using compensation function on the host computer side can compensate the coordinate deviation between an input point on Touch Screen and a point of cursor indication and make them match to the one point.



§ TSC-52/U-F      TSC-52/U-F dispenses a need to newly design the peripheral circuits, and can easily be used by connecting to the touch screen and the host. Using the driver software enables the mouse emulation on various operation systems and dispenses the need to newly design the controller software.

TSC-52/U-F is lead-free and compliant with RoHS.

### 1.3. Peripheral Composition Overview

A resistive touch screen is operated by resistance sensitive system between two layers such as film or glass. Two pieces of transparent materials with conductive coating are placed in the same direction as two electrodes face each other. The touch screen is activated when these transparent conductive layers are pressed to contact each other with a finger or a pen. The one of these conductive layers functions as an X-coordinates electric circuits and the other as a Y-coordinates circuits. To measure the X-coordinates TSC-52/U-F supplies voltage,  $V_{cc}$  to the one of X-coordinates electrodes with GND to the other. When the touch screen is pressed under this environment the voltage of the X-coordinates resistance is detected by the Y-coordinates electrode ( $A_{in}$ ) at the input point ( $x1$ ), where the X-Y coordinate resistance layers make contact. The detected voltage in supply side is higher than the GND side, which means ' $A_{in}$ '= $V_{cc}$  at the point 'E' and ' $A_{in}$ '= $0(*1)$  at the point 'A'. TSC-52/U-F calculates coordinates data starting from A/D conversion of the ' $A_{in}$ ' voltage. The Y-coordinates is measured in the same way. By repeating this process alternately, coordinate value at the input point is determined.

(\*1) Excluding the loss in the controller circuits and touch screen. Actual detected voltage should be lower than ' $V_{cc} - GND$ ' because of loss happened in the circuitry.

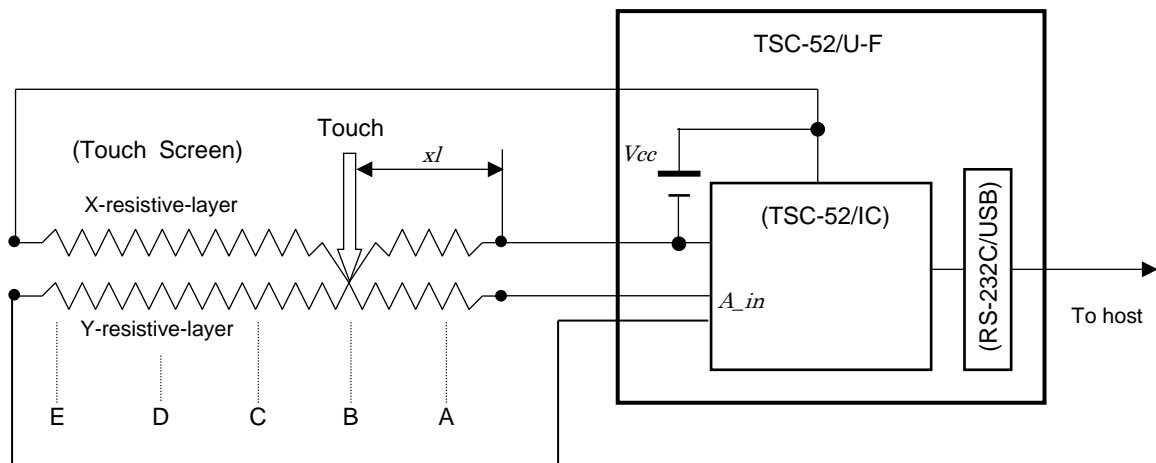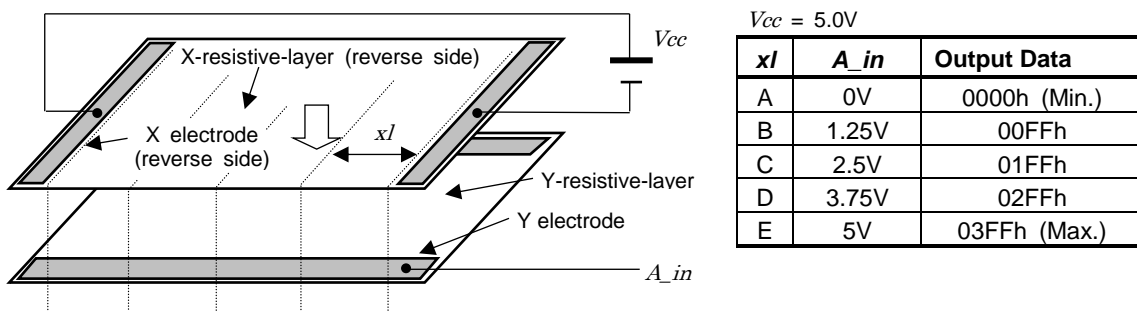

### 1.4 Supported Sizes of Touch Screens


The supported sizes of touch screen is from 4.3inch Wide to 21.5inch Wide in DMC's 4-wire resistive touch screen lineups. (LST touch screen series is recommended)

\*Please note that pin pitch of LST 5.7inch and larger models does not fit this controller.  
([TSC-52/U-F] is for 1.00mm pin pitch while pin pitch of LST 5.7 inch and larger model is 1.25mm)  
For LST 5.7inch and larger models, please use another controller, [TSC-52/U].

### 1.5 Gesture function


#### (1) Pinch-in/Pinch-out

Pinch-out is defined as the motion that when 2 points are input, the distance between them moves bigger. While Pinch-in is defined as the motion that when 2 points are input, the distance between them moves narrower. There are two case in Pinch-in/Pinch-out as shown below.

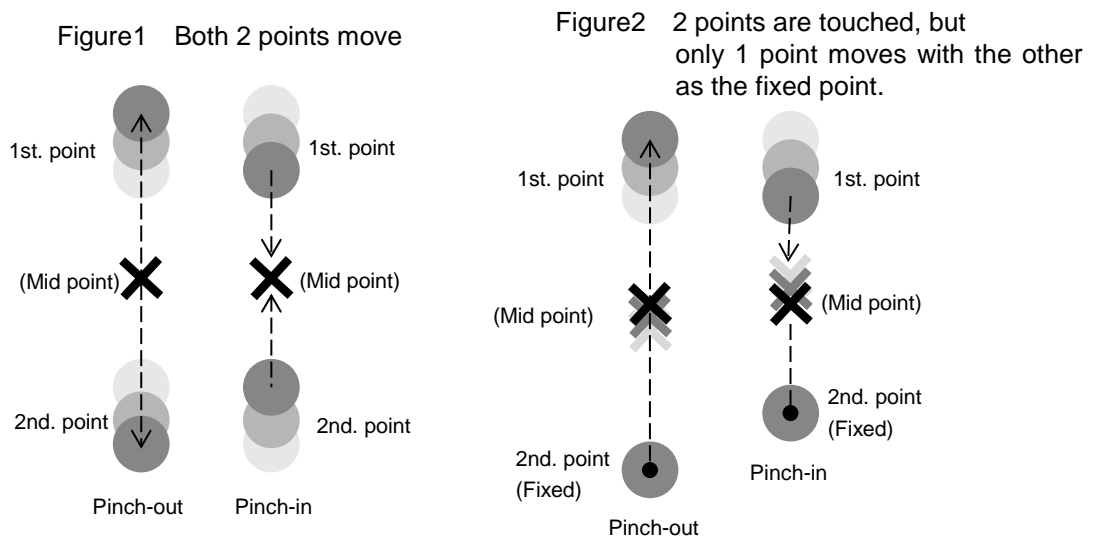

#### (2) Rotation

Rotation is defined as the motion that when 2 points are input, the both 2 points rotate clockwise or counter-clockwise with the mid point as center, and one point rotates with the other fixed as center.

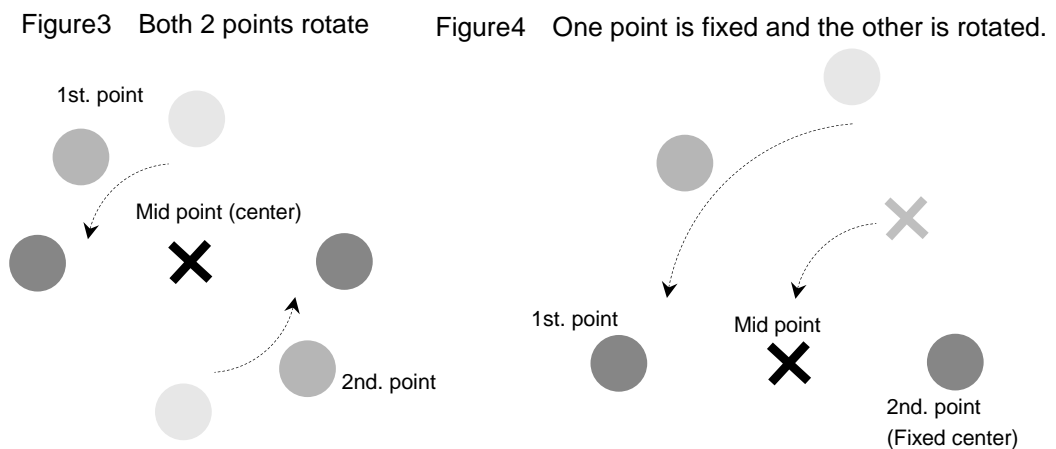

## 2. Specifications


### General Specifications

Item		Rating	Remarks
Operating Temp.	Serial/USB	-20°C to +85°C	No dew condensation
Storing Temp.	Serial/USB	-20°C to +85°C	No dew condensation
Supply Voltage		DC 5.0V ± 5[%]	
Consumption Current		55mA (TYP)	In USB mode, Vin=5.0V, one point touch input.
Correspondence (Serial)	Format	Asynchronous Serial	Fixed value
	Transfer Rate	9600bps	
	Data Format	8bit	
	Stop Bit	1bit	
	Parity	None	
Correspondence (USB)	Spec	USB Specification 2.0 Full Speed	
	Transfer Mode	Interrupt transfer (coordinate)	
	Device class	HID	
Frequency		16MHz	16MHz fixed
Dimension		30 x 53 mm	
Max height of components		4.8 mm	

Performance Specifications

Description	Rating	Note
Coordinate Output Rate (point/sec)	150p/s	
Coordinate Resolution	10bit (1024 x 1024)	The value will be lower in the active area of the touch screen
Linearity Error	±3 LSB	
Input Response Time	10ms (TYP)	
2-point Input Resolution	Min. 2-point input-able distance: 7mm typ. After gesture calibration : 4mm typ.	with LST-121B080A (12.1in) *Refer to the graph shown below

Note : This product does not guarantee position accuracy in two-point(two-finger) touching since it is a touch screen controller exclusively designed for realizing gesture functions with two-finger touch.

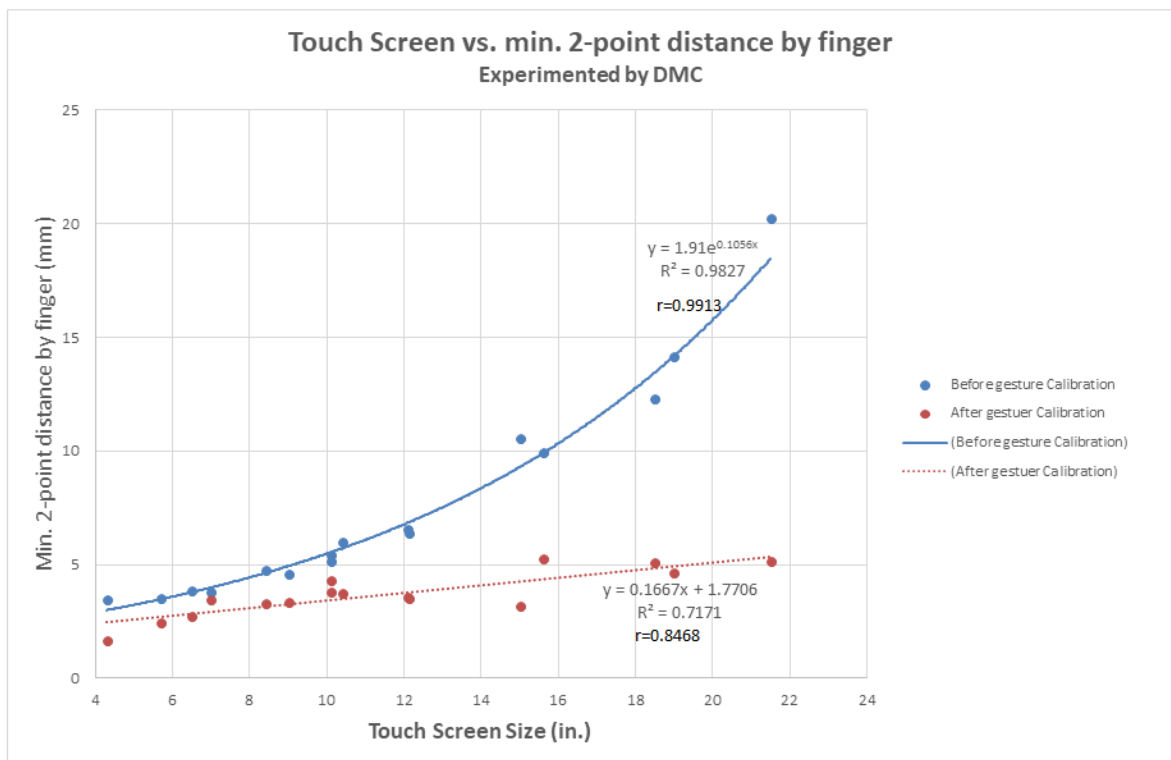

### 3. Connector

#### 3.1. Explanation of a connector terminal

CN	Terminal	Name	Function
CN1	1	Vin	Power Input
	2	GND	GND
CN2	1	Vbus	USB Vbus
	2	D-	USB D-
	3	D+	USB D+
	4	GND	USB GND
	5	Shield	USB FG
CN3	1	Dout	RS-232C Data Output
	2	Din	RS-232C Data Input
	3	GND	RS-232C GND
CN7	1	YD	Touch screen Input YD.
	2	XL	Touch screen Input XL.
	3	YU	Touch screen Input YU.
	4	XR	Touch screen Input XR.
CN8	1	I2C0_SDA	Unused
	2	I2C0_SCL	Unused
	3	TEST1	Unused
	4	GND	Unused

\*Please connect touch screen to the connector according to "terminal name", rather than "terminal number", (Example: Connect YD pin of touch screen to YD pin of CN7)

#### 3.2. The mounted connector

CN	P/N	Manufacturer
CN1	S2B-PH-K-S	J.S.T. Mfg Co., Ltd
CN2	S5B-PH-K-S	J.S.T. Mfg Co., Ltd
CN3	S3B-PH-K-S	J.S.T. Mfg Co., Ltd
CN7	04FMS-1.0SP-TF	J.S.T. Mfg Co., Ltd
CN8	S2B-PH-K-S	J.S.T. Mfg Co., Ltd



## 4. Interface type

TSC-52/U-F has serial and USB interface type. You choose either type. You cannot use both these at the same time.

(Notice) In the state that connected a serial and a USB cable to a computer, please do not start power on of TSC-52/U-F and computer. Because it may cause malfunction.

### 4.1. Serial mode

In serial mode, please use CN3 for connecting to host computer, and CN1 for power supply.

#### Specifications

Transmission format: Asynchronous serial

Transfer rate: 9600bps

Data format: 8 bit

Stop bit: 1 bit

Parity: None

### 4.2. USB mode

In USB mode, please use CN2 for connecting to host computer.

#### Specifications

Transmission spec: USB Specification 2.0 Full Speed

Transfer mode: Interrupt transfer (Coordinate)

Device class: HID

## 5. Packing Specification

### 5.1. Outline


TSC-52/U-F is wrapped up in the air packing of the prevention of static protection type and puts it in a packing box.

### 5.2. Packing material

Outer case: 75 x 55 x 15 mm, clay coated newsback board

Cushioning: 120 x 70 mm, air packing, static protection

### 5.3. Outer case and lot label

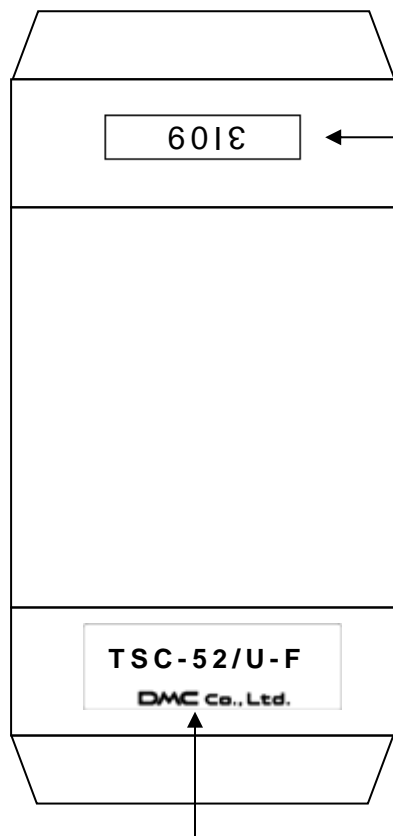

Lot number

Sample: 3I09

3: the last digits of the year

I: Month    Jan : A    Jul : G

              Feb : B    Aug : H

              Mar : C    Sep : I

              Apr : D    Oct : J

              May : E    Nov : K


              Jun : F    Dec : L

09: Date manufactured

Product name, DMC logo


### 5.4. Product name label

Backside of board  
(Sample)

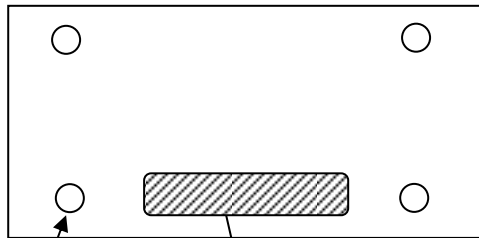

Screw Hole

Product Name Label

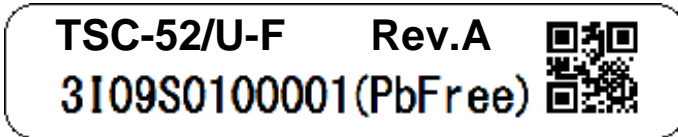

TSC-52/U: Product name  
Lot#: 3I09S0100001

Definitions of the lot number

① 3I09

3: the last digits of the year

I: Month	Jan : A	Jul : G
	Feb : B	Aug : H
	Mar : C	Sep : I
	Apr : D	Oct : J
	May : E	Nov : K
	Jun : F	Dec : L

09: Date manufactured

② S01: Control number for DMC use

③ 00001: Serial number (5 digits)

Rev: Revision information

(PbFree): lead free

QR code: lot number [3I09S0100001] can be read with a barcode reader. (Product name and revision information are not included.)

## 6. Changes & Improvements

### 6.1. Version History

Ver. 1.0 (November 20, 2020)

First edition release

## **7. Warranty**

### **7.1. Warranty Period**

- § The warranty period is limited to 1 year from the date of shipping. The warranty for the initial deflection such as appearance deflection is limited to 1 month.
- § Any defected parts under proper use will be examined by the supplier and replaced by the new parts if the deflection is considered to be caused by the supplier.
- § The replacement is subject to be included in the next lot.

### **7.2. Warranty Target**

- § The warranty only covers the product itself and does not cover any damage to others caused by using this product. Onsite repair or replacement is not supported.
- § We will do our best for delivery problem and product defections, but the warranty for the production line is not covered.

### **7.3. Warranty Exceptions**

Following conditions are not covered with the warranty and subject to charge.

- § Any malfunctions and damages during transportation and transfer by the user.
- § Any malfunctions and damages caused by a natural disaster or a fire.
- § Any malfunctions and damages caused by static electricity
- § Any malfunctions and damages caused by the failure of the associated equipment.
- § If the product is remodeled, disassembled or repaired by the user.
- § If the product is glued onto the equipment and uninstalled.
- § Any malfunctions and damages caused by an improper usage and handling against the specifications and notes.

## **8. Precautions for Use**

### **8.1. General Handling**



- § Keep the product away from any conductive objects while in use.
- § Do not touch the conductive part of the product to avoid being damaged by the electrostatic discharge.  
Follow the proper procedure for handling.
- § Keep the product in the proper storing environment and avoid any load to the product.
- § Do not use or store the product in the severe condition like following:
  - Wet environment or a condition where the product is likely to get wet.
  - Where dew condensation is likely to occur.
  - Near solvent or acid.
- § Do not take apart or alter the product.

### **8.2. Others**

- § The contents of this document are subject to change without notice.
- § The manufacturer or sales representatives will not be liable for any damages or loss arising from use of this product.
- § This product is intended for use in standard applications (computers, office automation, and other office equipment, industrial, communications, and measurement equipment, personal and household devices, etc.) Please avoid using this product for special applications where failure or abnormal operation may directly affect human lives, or cause physical injury or property damage, or where extremely high levels of reliability are required (such as aerospace systems, vehicle operating control, atomic energy controls, medical devices for life support, etc.).
- § Any semiconductor devices have inherently a certain rate of failure. The user must protect against injury, damage, or loss from such failures by incorporating safety design measures into the user's facility and equipment.

TSC-52/U-F User's Guide  
Rev. 1.0 November 20, 2020  
©2020 DMC Co., Ltd.

This document can be freely distributed, but any alternation to this document is prohibited.

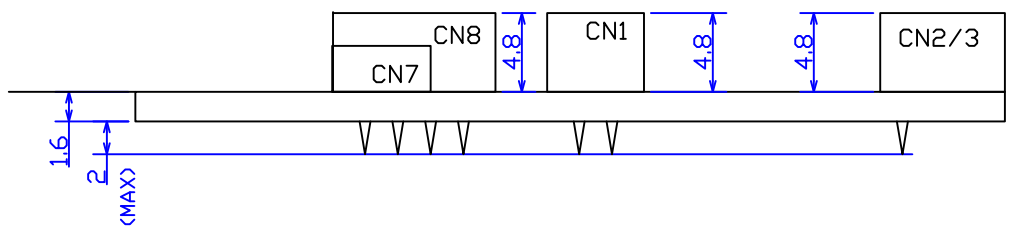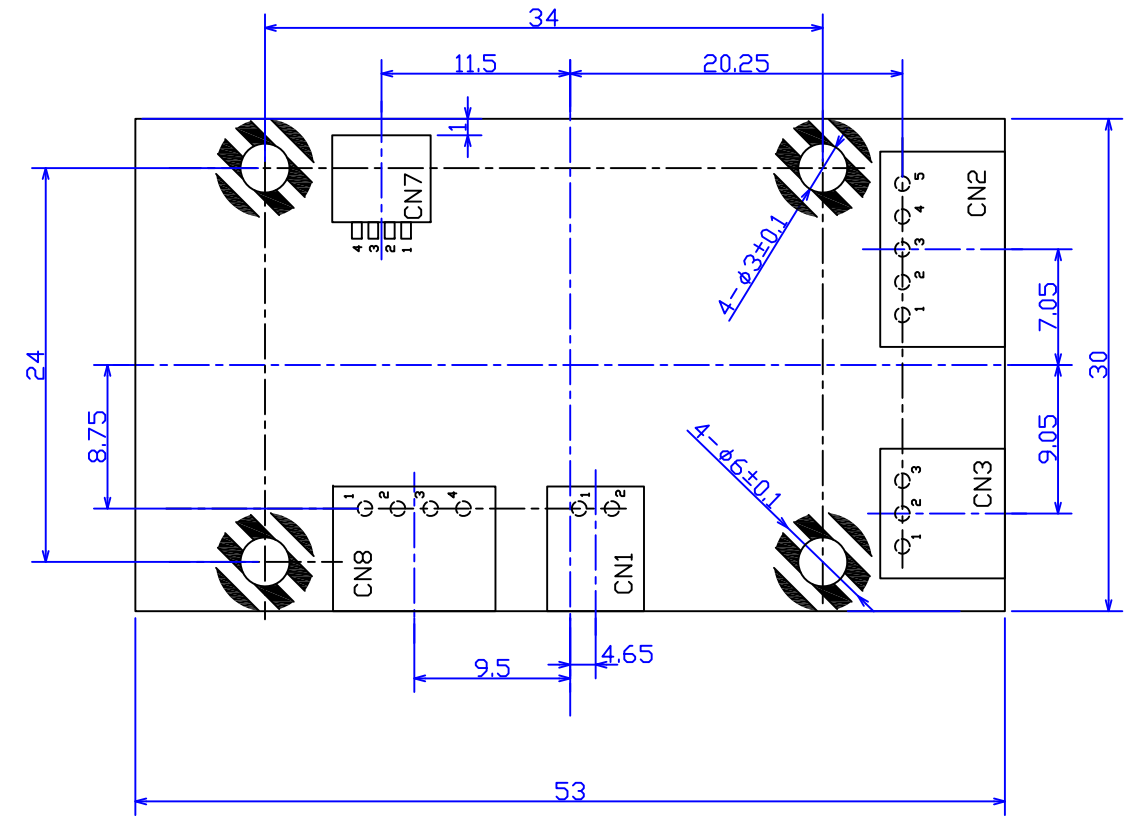

※Tolerance: ±0.3mm except for hole diameter  
 ※Material: FR-4  
 ※Mass: 8g (Typ.)  
 ※Unit: mm

Date	P/N
November 17, 2020	TSC-52/U-F
Name	
Dimensional Drawing	Rev.1.0
DMC Co., Ltd.	