



CN-1 PinOut		CN-2 PinOut	
1	Dummy	1	NC
2	Y32	2	NC
3	Y31	3	NC
4	Y30	4	NC
5	Y29	5	NC
6	Y28	6	NC
7	Y27	7	NC
8	Y26	8	NC
9	Y25	9	NC
10	Y24	10	NC
11	Y23	11	NC
12	Y22	12	NC
13	Y21	13	NC
14	Y20	14	NC
15	Y19	15	NC
16	Y18	16	NC
17	Y17	17	NC
18	Y16	18	NC
19	Y15	19	NC
20	Y14	20	NC
21	Y13	21	Dummy
22	Y12	22	X57
23	Y11	23	X56
24	Y10	24	X55
25	Y09	25	X54
26	Y08	26	X53
27	Y07	27	X52
28	Y06	28	X51
29	Y05	29	X50
30	Y04	30	X49
31	Y03	31	X48
32	Y02	32	X47
33	Y01	33	X46
34	Y00	34	X45
35	Dummy	35	X44
36	NC	36	X43
37	NC	37	X42
38	NC	38	X41
39	NC	39	X40
40	NC	40	X39
41	NC	41	X38
42	NC	42	X37
43	NC	43	X36
44	NC	44	X35
45	NC	45	X34
46	NC	46	X33
47	NC	47	X32
48	NC	48	X31
49	NC	49	X30
50	NC	50	X29
51	NC	51	X28
52	NC	52	X27
53	NC	53	X26
54	NC	54	X25
55	NC	55	X24
		56	X23
		57	X22
		58	X21
		59	X20
		60	X19
		61	X18
		62	X17
		63	X16
		64	X15
		65	X14
		66	X13
		67	X12
		68	X11
		69	X10
		70	X09
		71	X08
		72	X07
		73	X06
		74	X05
		75	X04
		76	X03
		77	X02
		78	X01
		79	X00
		80	Dummy

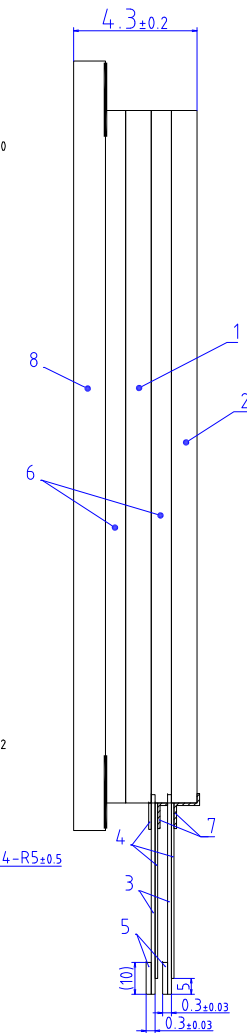

REMARKS	
FPC PATTERN PITCH	0.5mm
FPC PATTERN WIDTH	Cu 0.2-0.3mm
	Ag - mm
CIRCUIT PATTERN WIDTH	Ag 0.075mm
	- mm
O TOLERANCE=±0.3mm	

ITEM	MATERIAL	REMARKS
1 TOP ITO GLASS	t=1.1mm	
2 BOTTOM ITO GLASS	t=1.1mm	
3 FPC	POLYIMIDE 12.5μm	Electrolytic copper foil on base
4 REINFORCEMENT FILM	POLYIMIDE 25μm	
5 STIFFENER	POLYIMIDE 225μm	
6 ADHESIVE SHEET	150μm	
7 PROTECTION TAPE	POLYESTER 25μm	
8 COVER GLASS	t=1.8mm	Clear/Chemical strengthening Black printing



TOLERANCE=±0.3mm
EXCEPT WHERE INDICATED
UNIT=mm

PART No.	DATE
DUS-LA156WA060A2A	Jan/21/2021
TYPE	DMC Co., Ltd.
Projected Capacitive DIMENSIONAL DRAWING	